


LSX/XSD砂石洗选机系列

本系列产品专为砂石、石英砂等单位作洗选、分级、脱水而优先设计。其新颖的密封结构，可调式溢流堰板。确保该系列产品高效、耐用。适用于砂石厂、建筑工地、水电大坝、玻璃制造业、油井开发业等用砂单位。

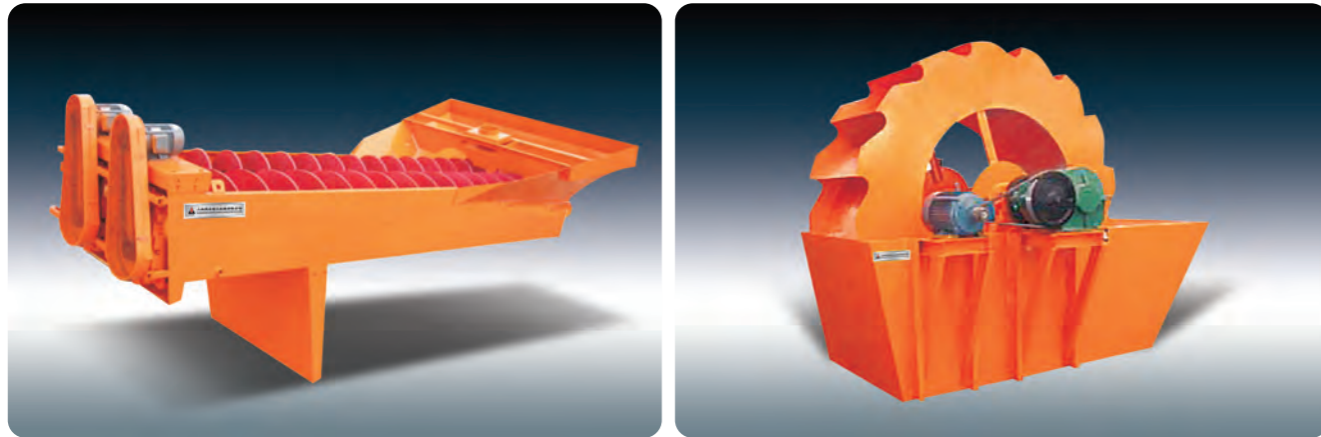

LSX/XSD Sandstone Washer Series

This product series are optimized to design for washing, grading and dehydrating of sandstone, arenaceous quartz. with the novel pressurize structure, debugging overfall notch plate, guarantee high efficiency, longer life, are used to sandstone factory, construction site, hydroelectric station dam, glass manufacturing, oil well developing, etc.

技术参数 Specification

型号 Model	螺旋数量 Number of screw	螺旋直径 Screw Diameter (mm)	水槽长度 Tub Length (mm)	入选粒度 Suff Size (mm)	处理能力 Capacity (t/h)	螺旋转速 Screw Speed (r/min)	电机功率 Screw Speed (r/min)	耗水量 Water requirement (t/h)	机器重量 Weight (kg)	外形尺寸 Overall Dimension (mm)
LSX-920	1	950	7585	≤10	100	21	11	10-80	6200	8420 × 2810 × 3960
2LSX-920	2	920	7585	≤10	200	21	11 × 2	20-60	1150	8420 × 3970 × 3960
LSX-1120	1	1120	9750	≤10	175	17	18.5	20-150	10900	10770 × 3950 × 4860
2LSX-1120	2	1120	9750	≤10	350	17	18.5 × 2	40-300	17800	10770 × 5260 × 4860

型号 Model	叶轮规格 Impeller specification (D×H)(mm)	叶轮转速 Impeller rotary speed (r/min)	处理能力 Capacity (t/h)	进料粒度 Suff Size (mm)	耗水量 Water requirement (t/h)	电机功率 Electric power (kw)
XSD2610	φ2600 × 1000	1.178	20-50	≤10	20-60	5.5
XSD2816	φ2800 × 1600	1.177	30-60	≤10	50-100	11
XSD3016	φ3000 × 1600	1.179	50-120	≤10	70-120	15
XSD3620	φ3600 × 2000	1.180	80-150	≤10	80-140	18.5

DT皮带输送机系列

本公司生产的皮带输送机具有输送量大、结构简单、维修方便、部件标准化等优点。它广泛的应用在矿山、冶金、煤炭等部门，用来输送松散物料或成件物品。根据输送工艺要求，可以单台输送也可多台组合或与其他输送设备组成水平或倾斜的输送系统以满足不同布置形式的作业线需要。



Belt Conveyor Series

The JIANYE belt conveyor series has a feature of large capacity, simplified construction, easy maintenance, standardized components. It is widely used in mining, metallurgy industry feeding the relax material and member goods, according to the request of transport technology. It can be used in single, multiple or combined with other equipment to form horizontal or incline transportation system to satisfy different production line arrangement needs.

技术参数 Specification

皮带宽度 Belt Width	输送长度 (m) 功率 (Kw)	Belt Length Power	输送速度 (m/s) Belt Speed	处理能力 Capacity (t/h)
400	≤12 1.5	12-20 2.2	20-25 3	0.8-2.0 40-80
500	≤12 3	12-20 4	20-30 5.5	0.8-2.0 78-191
650	≤12 4	12-20 5.5	20-30 7.5	0.8-2.0 131-323
800	≤6 3	6-15 5.5	15-25 7.5	1.0-2.0 278-546
1000	≤10 5.5	10-20 7.5	20-25 11	1.0-2.0 435-853
1200	≤10 7.5	10-20 11	20-25 15	1.0-2.0 655-1284

附注: 1. 本汇总表的输送量范围是依据松散密度 1.6 t/m³ 的碎石给定。 2. 输送机安装倾角 ≤ 18°。(本表输送量按 0° 标定。) 3. 本公司另可根据用户的特殊需要进行设备配置设计。

Notes: 1. The table specified capacity is relative to crushed stone with loose volume density 1.6 t/m³. 2. Belt inclined angle should be than 18°. 3. The company is capable to make special design to meet the needs of specific customers.